



STEPPING MOTOR

型号 MODEL	相数	步距角 (DeG.)	电压 (V)	电流 (A)	保持转矩 (N. m)	空载起动 频率(Hz)	运行频率 (Hz)	接线图 (wdg)	备注 (notes)
90BF001	4	0.9/1.8	80	7	3.92(40)	2000	8000	b	可供双轴伸
90BF002	5	0.75/1.5	80	7	3.92(40)	3800	16000	c	可供双轴伸
90BF003	3	1.5/3	60	5	1.96(20)	1500	8000	a	可供双轴伸
90BC5100B	5	0.36/0.72	24	3	2.156(22)	2400	8000	c	可供双轴伸
90BC340AH	3	1.5/3	60~110	5	1.5(14.7)	1200	10000	e	可供双轴伸
90BC340BH	3	1.5/3	60~110	5	3.7(36.3)	1100	10000	e	可供双轴伸
90BC340CH	3	1.5/3	60~110	5	5.5(53.9)	1000	10000	e	可供双轴伸
110BF003	3	0.75/1.5	80	6	7.84(80)	1500	7000	a	可供双轴伸
110BF003(新)	3	0.75/1.5	80~300	6	7.84(80)	1400	15000	d	可供双轴伸
110BF004	3	0.75/1.5	30	4	4.9(50)	500		a	可供双轴伸
110BC380B	3	0.75/1.5	80~300	6	9.8(100)	1350	15000	d	
110BC380C	3	0.75/1.5	80~300	6	9.8(100)	1350	15000	d	可供双轴伸
110BC380F	3	0.75/1.5	80~300	6	11.76(120)	1200	15000	e	可供双轴伸
110BC380L	3	0.75/1.5	80~300	6	7.84(80)	1400	15000	d	
110BC380M	3	0.75/1.5	80~300	6	9.8(100)	1350	15000	d	

\*接线图:



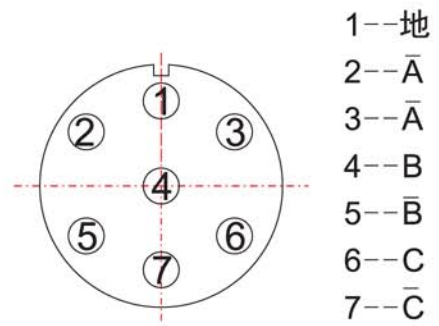


图 d

图 e

型号 MODEL	ΦD	ΦD1	b	E	L	h1	h2	Φd	ΦD2	Φd1	键 (key) A
90BF001	90	70	92	25	145	3	6	9 <sup>-0.01</sup> <sub>-0.027</sub>	107	6.6	半圆3x10
90BF002	90	70	92	25	145	3	6	9 <sup>-0.01</sup> <sub>-0.027</sub>	107	6.6	半圆3x10
90BF003	90	70	92	25	125	3	6	9 <sup>-0.01</sup> <sub>-0.027</sub>	107	6.6	半圆3x10
90BC5100B	90	70	92	25	65	3	6	9 <sup>-0.01</sup> <sub>-0.027</sub>	107	6.6	半圆3x10
90BC340AH	90	70	92	27.5	120	2	6	12 <sup>-0.01</sup> <sub>-0.027</sub>	107	6.6	平键4x20
90BC340BH	90	70	92	27.5	150	2	6	12 <sup>-0.01</sup> <sub>-0.027</sub>	107	6.6	平键4x20
90BC340CH	90	70	92	27.5	180	2	6	12 <sup>-0.016</sup> <sub>-0.027</sub>	107	6.6	平键4x20
110BF003	110	85	112	27	156	4	8	11 <sup>-0.016</sup> <sub>-0.034</sub>	132	9	平键4x20
110BF003(新)	110	85	112	29	186	4	8	14 <sup>0</sup> <sub>-0.034</sub>	132	9	平键4x20
110BF004	110	85	112	27	111	4	8	11 <sup>-0.016</sup> <sub>-0.034</sub>	132	9	平键4x20
110BC380B	110	85	112	66	206	4	8	14 <sup>0</sup> <sub>-0.011</sub>	132	9	平键4x20
110BC380C	110	85	112	35	206	4	8	14 <sup>0</sup> <sub>-0.011</sub>	132	9	平键4x20
110BC380F	110	85	112	35	226	4	8	14 <sup>0</sup> <sub>-0.011</sub>	132	9	平键4x20
110BC380L	110	85	112	39	186	4	8	14 <sup>0</sup> <sub>-0.011</sub>	132	9	平键4x20
110BC380M	110	85	112	35	206	4	8	14 <sup>0</sup> <sub>-0.011</sub>	132	9	平键4x20

外形尺寸mm:

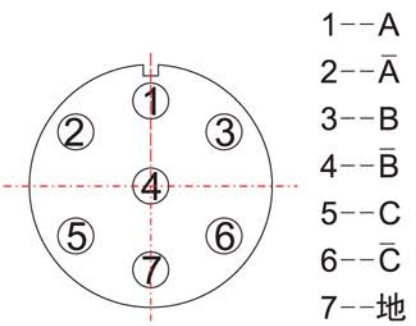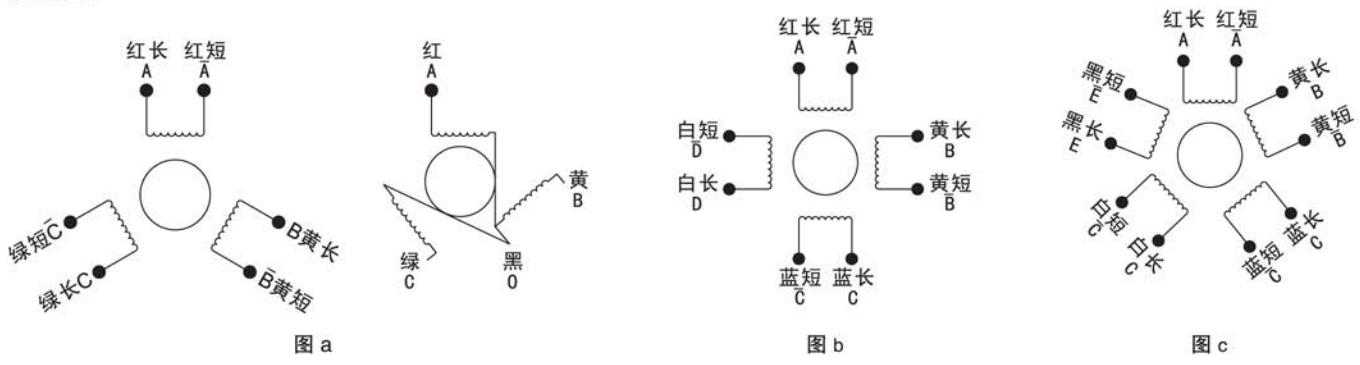